

Sunny Inspire

105W Flexible PV Solar Module

SunPower IBC

- Aesthetically using clear surface back-contact cells
- Made with light weight polymer materials, suitable to install on a curved surface
- Cells with High conversion efficiency above 24%
- Performs well in diffuse light and high-temperature conditions
- Excellent performance under low light conditions



Electrical Specifications

Model Type	SA-F105
Peak Power (Pmax)	105W
Module Efficiency	19.20%
Maximum Power Voltage (Vmp)	17.9V
Maximum Power Current (Imp)	5.8A
Open Circuit Voltage (Voc)	21.6V
Short Circuit Current (Isc)	6.5A
Power Tolerance	-5% / + 10%
Maximum System Voltage	70V
Normal Operating Cell Temp.	46 °C (+/-2)

Mechanical Specifications



Cell type	Back contact high eff. Mono
Number of cells	32 cells in series
Weight	6.24kg [13.76lbs]
Dimensions	1065 x 535mm [41.96 x 21.08]
Thickness	2mm [0.08in] Including jbox: 12mm [0.47in]
Junction Box	AM3101 (IP 65 waterproof)
Cables	2.5mm ² , 500mm
Connectors	AM4101 (MC4 compatible)

Temperature Coefficients

Power	-0.27%/°C
Voltage	-0.236%/°C
Current	0.058%/°C

Warranties & Certifications

Warranties	2 years product warranty, 5 years limited power warranty of 80% of the minimum specified power rating
------------	---

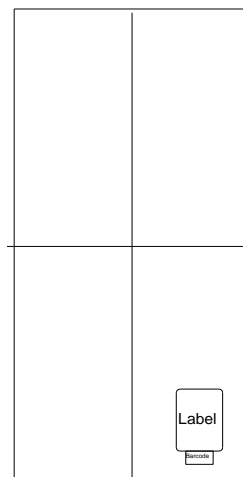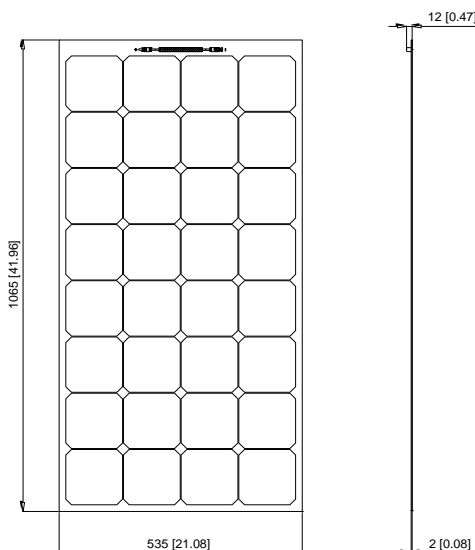

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2025 Sunny Inspire Limited. All right reserved. Specifications included in this datasheet are subject to change without notice.

Sunny Inspire Limited

www.sunnyinspire.com

Rm 1505, 15/F Star House, No. 3 Salisbury Rd, TST, KLN, Hong Kong | T: +852-2736 2080 | info@sunnyinspire.com