


Sunny Inspire

175W Solar PV Module

SunPower IBC

- Made with 125mm SunPower Interdigitated Back Contact solar cells
- Aesthetically using clear surface back-contact cells
- Cells with High conversion efficiency above 24%
- Performs well in diffuse light and high-temperature conditions
- Excellent performance under low light conditions

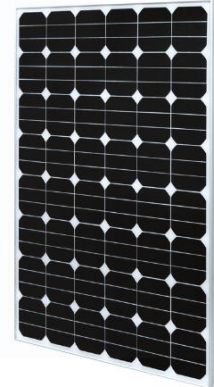

Electrical Specifications

Model Type	SA-H175	SA-H175
Peak Power (Pmax)	175W	175W
Module Efficiency	20.30%	20.30%
Maximum Power Voltage (Vmp)	22.1V	44.1V
Maximum Power Current (Imp)	7.93A	3.97A
Open Circuit Voltage (Voc)	25.9V	51.9V
Short Circuit Current (Isc)	8.37A	4.19A
Power Tolerance	-5% / + 10%	
Maximum System Voltage	600V	
Normal Operating Cell Temp.	46 °C (+/- 2)	

Mechanical Specifications



Cell type	IBC
Number of cells	Total 144 cells, 36 cells in series
Weight	10.77kg [23.74lbs]
Dimensions	1082 x 796 x 35mm [42.55 x 31.36 x 1.38in]
Frame	> 15μm clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm ² , 900mm
Connectors	MC4 compatible

Temperature Coefficients

Power	-0.27%/°C
Voltage	-0.236%/°C
Current	0.058%/°C

Warranties & Certifications

Warranties	5 years product warranty, 20 years limited power warranty of 80% of the minimum specified power rating
Certificates	CE

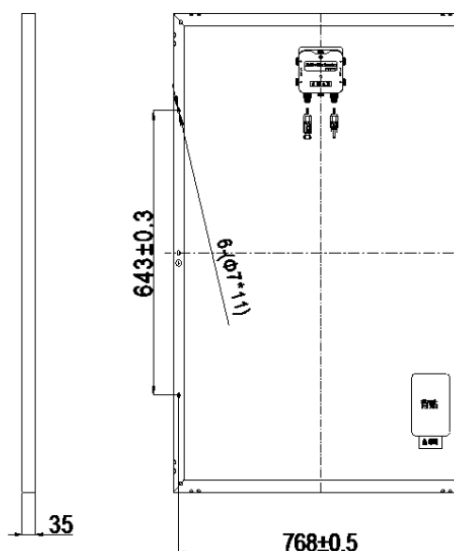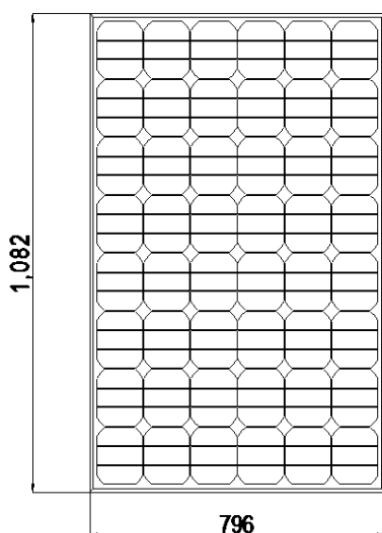

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2025 Sunny Inspire Limited.
All right reserved.
Specifications included in this datasheet are subject to change without notice.