

Sunny Inspire

80W Solar PV Module

SunPower IBC

- Made with 125mm SunPower Interdigitated Back Contact solar cells
- Aesthetically using clear surface back-contact cells
- Cells with High conversion efficiency above 24%
- Performs well in diffuse light and high-temperature conditions
- Excellent performance under low light conditions



Electrical Specifications

Model Type	SA-H80
Peak Power (Pmax)	80W
Module Efficiency	20.40%
Maximum Power Voltage (Vmp)	19.9V
Maximum Power Current (Imp)	4.02A
Open Circuit Voltage (Voc)	23.3V
Short Circuit Current (Isc)	4.25A
Power Tolerance	-5% / + 10%
Maximum System Voltage	600V
Normal Operating Cell Temp.	46 °C (+/- 2)

Mechanical Specifications


Cell type	IBC
Number of cells	Total 64 cells, 32 cells in series
Weight	4.97kg [10.96lbs]
Dimensions	734 x 535 x 35mm [28.92 x 21.08 x 1.38in]
Frame	> 15μm clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm ² , 900mm
Connectors	MC4 compatible

Temperature Coefficients

Power	-0.27%/°C
Voltage	-0.236%/°C
Current	0.058%/°C

Warranties & Certifications

Warranties	5 years product warranty, 20 years limited power warranty of 80% of the minimum specified power rating
Certificates	CE

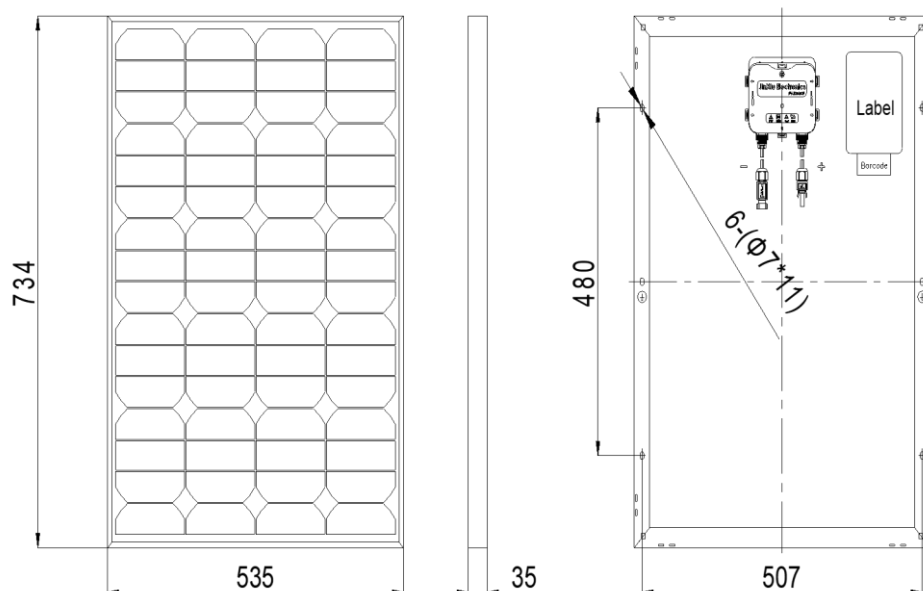

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2025 Sunny Inspire Limited. All right reserved. Specifications included in this datasheet are subject to change without notice.

Sunny Inspire Limited

www.sunnyinspire.com

Rm 1505, 15/F Star House, No. 3 Salisbury Rd, TST, KLN, Hong Kong | Tel: +852-2736 2080 | info@sunnyinspire.com