

# Sunny Inspire

## 155W Flexible PV Solar Module

SunPower IBC

- Aesthetically using clear surface back-contact cells
- Made with light weight polymer materials, suitable to install on a curved surface
- Cells with High conversion efficiency above 24%
- Performs well in diffuse light and high-temperature conditions
- Excellent performance under low light conditions



### Electrical Specifications

Model Type	SA-F155	SA-F155
Peak Power (Pmax)	155W	155W
Module Efficiency	18.00%	18.00%
Maximum Power Voltage (Vmp)	19.8V	39.6V
Maximum Power Current (Imp)	7.8A	3.9A
Open Circuit Voltage (Voc)	24.1V	48.2V
Short Circuit Current (Isc)	8.6A	4.3A
Power Tolerance	-5% / + 10%	
Maximum System Voltage	70V	
Normal Operating Cell Temp.	46 °C (+/-2)	

### Mechanical Specifications


Cell type	IBC
Number of cells	Total 144 cells, 36 cells in series
Weight	9.63kg [21.23lbs]
Dimensions	1105 x 796mm [43.54 x 31.36]
Thickness	2mm [0.08in] Including jbox: 12mm [0.47in]
Junction Box	AM3101 (IP 65 waterproof)
Cables	2.5mm <sup>2</sup> , 500mm
Connectors	AM4101 (MC4 compatible)

### Temperature Coefficients

Power	-0.27%/°C
Voltage	-0.236%/°C
Current	0.058%/°C

### Warranties & Certifications

Warranties	2 years product warranty, 5 years limited power warranty of 80% of the minimum specified power rating
------------	---

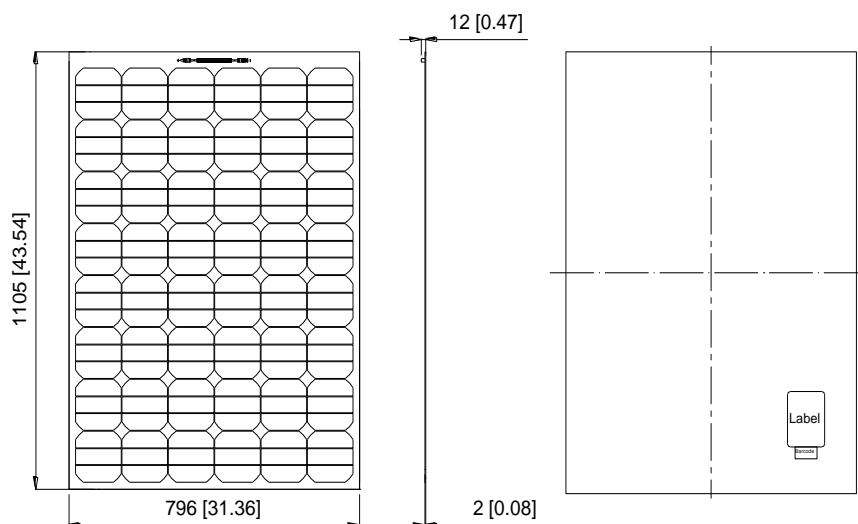

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m<sup>2</sup>, AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2025 Sunny Inspire Limited. All right reserved. Specifications included in this datasheet are subject to change without notice.

**Sunny Inspire** Limited

[www.sunnyinspire.com](http://www.sunnyinspire.com)

Rm 1505, 15/F Star House, No. 3 Salisbury Rd, TST, KLN, Hong Kong | T: +852-2736 2080 | [info@sunnyinspire.com](mailto:info@sunnyinspire.com)