


Sunny Inspire

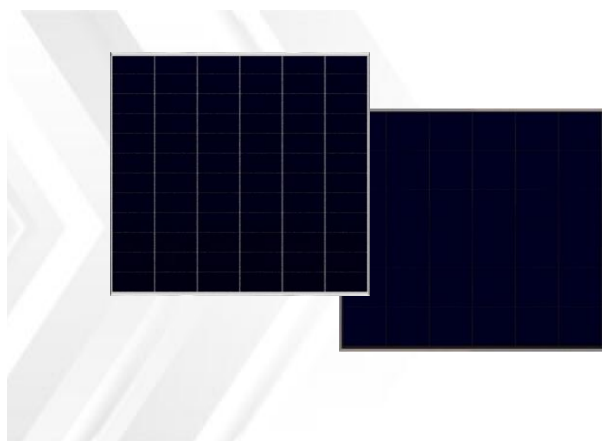

Features

- Aesthetically using clear surface back-contact cells
- Cells with High conversion efficiency above 24%
- N-type solar cell has no LID naturally
- Lower hot spot temperature, higher safety
- Lower shadow-blocking loss
- Better weak illumination response

Electrical Specifications

Model Type	SI-B415
Peak Power (Pmax)	415W
Module Efficiency	22.60%
Maximum Power Voltage (Vmp)	21.7V
Maximum Power Current (Imp)	19.12A
Open Circuit Voltage (Voc)	24.8V
Short Circuit Current (Isc)	20.19A
Power Tolerance	-5% / + 10%
Maximum System Voltage	600V
Normal Operating Cell Temp.	46 °C (+/- 2)

Mechanical Specifications



Cell type	IBC
Number of cells	total 102 cells, 34 cells in series
Weight	20kg [44.09lbs]
Dimensions	1625 x 1130 x 45mm [63.98 x 40.75 x 1.77in]
Frame	> 15μm clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm ² , 900mm
Connectors	MC4 compatible

Temperature Coefficients

Power	-0.290%/°C
Voltage	- 0.230%/°C
Current	+0.050%/°C

Warranties & Certifications

Warranties	5 years product warranty, 25 years limited power warranty of 80% of the minimum specified power rating
------------	--

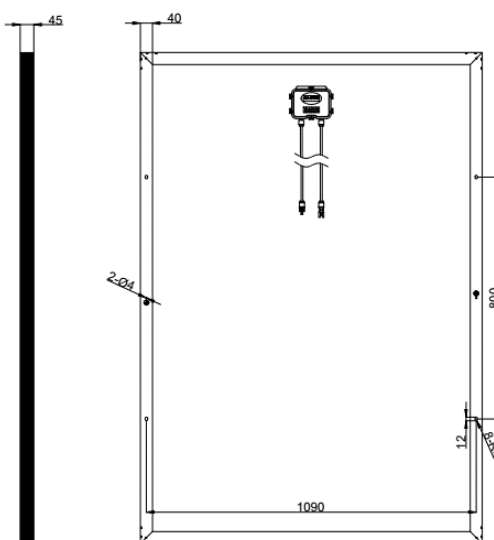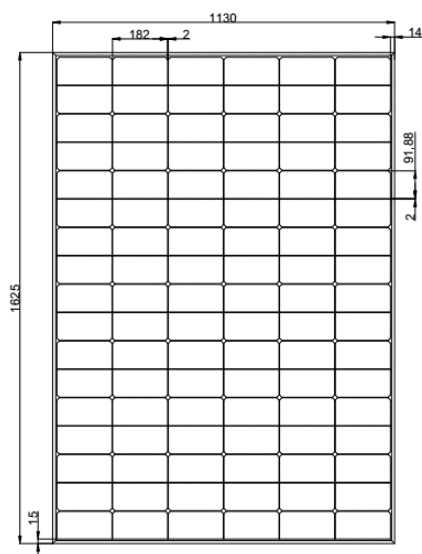

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2025 Sunny Inspire Limited. All right reserved. Specifications included in this datasheet are subject to change without notice.

Sunny Inspire Limited

www.sunnyinspire.com

Rm 1505, 15/F Star House, No. 3 Salisbury Rd, TST, KLN, Hong Kong | T: +852-2736 2080 | info@sunnyinspire.com